




Wall Spacers (for Tie Rod)

Safer, quicker and Cheaper than traditional methods

Pre-cut lengths of Tie Rod Plastic Sleeving to suit a range of wall thicknesses. Supplied with an integral water barrier and clearly marked with the relevant wall thickness

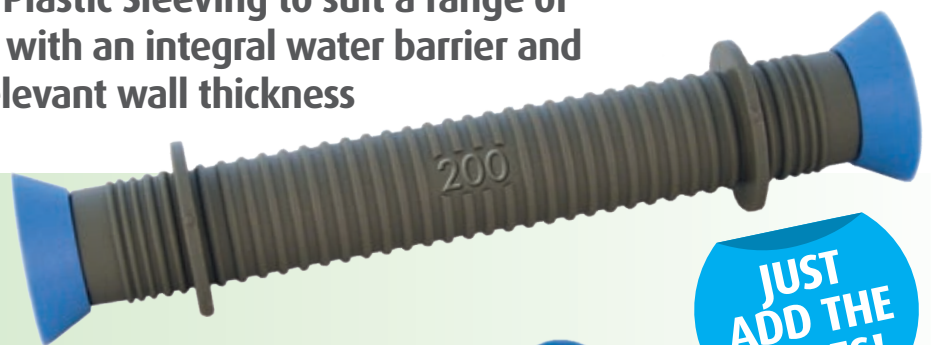

Advantages

- Can be used with a standard 22mm plastic cone
- No more problems of inaccurate lengths. Pieces are injection moulded so each piece is exactly the same length
- Wall thickness marked on the Spacer
- Safer building sites. No longer any need to make awkward saw cuts
- Greener – no wastage due to off-cuts or saw damaged pieces
- Greener – produced from recycled non-halogenated plastics
- Each piece comes complete with integral plastic disc to prevent waterpath down the outside of the sleeve
- Economical - labour savings means a cheaper option than cutting spacer tube

**JUST
ADD THE
CONES!**



Packaging

Wall Size (mm)	Length (mm)	Bag quantity
180	160	100
200	180	100
250	230	100
300	280	100

Improving choice, quality and service

Branches

St Neots	t 01480 702222	f 01480 702223
Airdrie	t 01698 907101	f 01698 907102
Warrington	t 01925 202128	f 01925 202129

Head Office

Hawkesden Road, St Neots, Cambs PE19 1QS
 t 01480 702222
 f 01480 702223
 e sales@miersconstructionproducts.co.uk
 www.miersconstructionproducts.co.uk