


# Self-adhesive Bitumen Waterproof Membrane

A high performance cold applied waterproof membrane suitable for internal and external tanking of underground structures in both vertical and horizontal applications

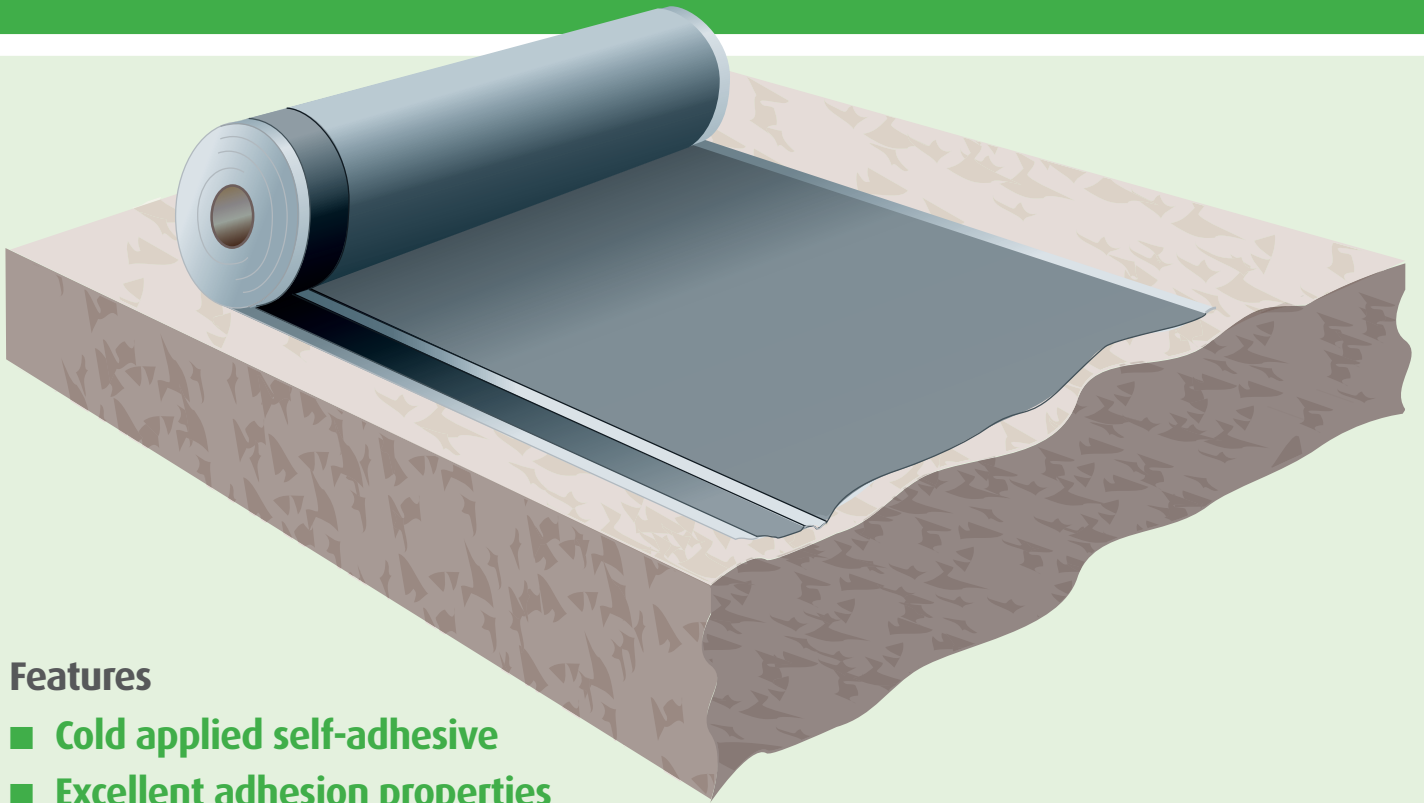

## Features

- Cold applied self-adhesive
- Excellent adhesion properties
- High tensile strength
- Good low temperature performance

Improving choice, quality and service




# Self-adhesive Bitumen Waterproof Membrane

Self-adhesive bitumen waterproof membranes are produced with SBS elastomeric and bitumen with a self-adhesive polyethylene film.

- It is recommended that substrates should be painted with tanking primer prior to application
- Lap joints should be a minimum of 150mm
- On external applications the membrane must be protected against puncture by the back fill

## Characteristics and Properties

Thickness (mm)	1.5mm
Width	1m
Length	20m
Operating temperature range	5°C to 30°C
Elongations (%*)	≥300
Tear resistance N/50M	≥200
Peel adhesion N/M	1576
Flexibility	-30°C

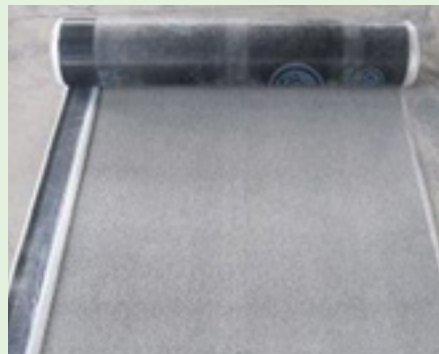

ISS 2 July 2019



### Nationwide Depots

<b>St Neots</b>	<b>t</b> 01480 702222	<b>f</b> 01480 702223
<b>Airdrie</b>	<b>t</b> 01236 541130	<b>f</b> 01236 541135
<b>Birmingham</b>	<b>t</b> 0121 2893 293	<b>f</b> 0121 2893 294
<b>Bordon</b>	<b>t</b> 01420 200 121	<b>f</b> 01420 200 122
<b>Launceston</b>	<b>t</b> 01566 721011	<b>f</b> 01566 721012
<b>Warrington</b>	<b>t</b> 01925 202 128	<b>f</b> 01925 202 129

### Head Office

Hawkesden Road, St Neots, Cambs PE19 1QS  
**t** 01480 702222  
**f** 01480 702223

**e** [sales@miersconstructionproducts.co.uk](mailto:sales@miersconstructionproducts.co.uk)  
[www.miersconstructionproducts.co.uk](http://www.miersconstructionproducts.co.uk)