

Dualfix

The next generation of track spacer

Description


An economic spacer for supporting mesh or bottom reinforcement in suspended slabs

Advantages

- Injection moulded which means it is stronger and less brittle than extruded products
- PVC free
- Manufactured from recycled plastics
- Can be separated by hand to form 2 x 1 metre lengths
- Each piece is stamped with its size
- Profile allows improved flow of concrete

Classification

Classified under BS7973 as a 'Normal' type line spacer

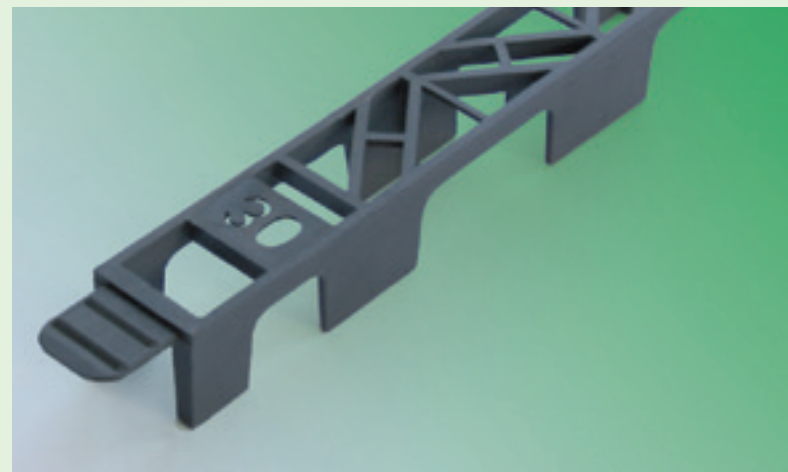

Performance table

All categories refer to BS7973

Requirement	Description	Result
6.2	min 25% voids	pass
7.3	± 2mm tolerance	pass
7.72	Breadth/height ratio	pass
9	max deflection of 1mm under 0.5kn test load	pass
11	marking of packs	pass

Improving choice, quality and service

Nationwide Depots

St Neots	t 01480 702222	f 01480 702223
Airdrie	t 01236 541130	f 01236 541135
Birmingham	t 0121 2893 293	f 0121 2893 294
Bordon	t 01420 200 121	f 01420 200 122
Launceston	t 01566 721011	f 01566 721012
Warrington	t 01925 202 128	f 01925 202 129

Head Office

Hawkesden Road, St Neots, Cambs PE19 1QS
t 01480 702222
f 01480 702223

e sales@miersconstructionproducts.co.uk
www.miersconstructionproducts.co.uk



FS 658263