


RiveStop is a patented elastic rivet with an internal mechanical waterproofing system designed to hermetically seal form tie holes in concrete structures



Improving choice, quality and service



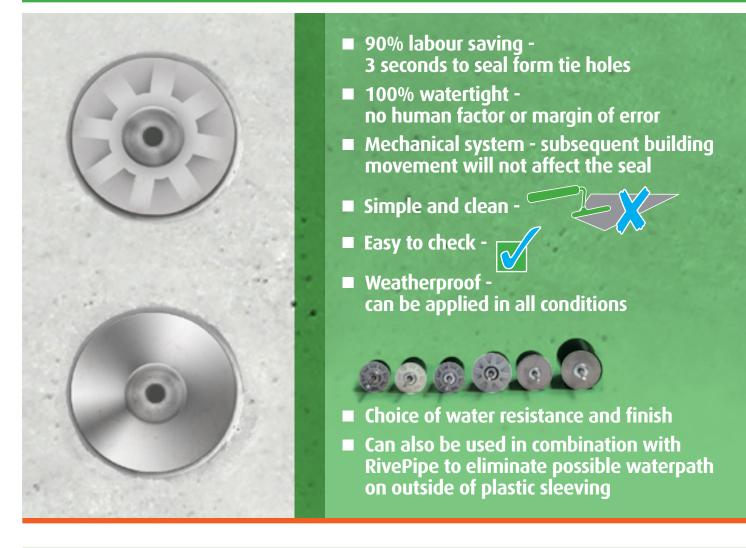

The quick way to provide 100% waterproofing for tie bar holes

How does it work?

RiveStop expands inside the formwork tie hole exerting force against the walls of the hole, thus sealing it completely. The mechanical system is activated with a riveter with uniform and controlled pressure. Once the pin of the rivet breaks off, the RiveStop is installed. No human factor is involved.

Using the right tool

Use a standard manual, 2-hand, long arm riveter (internal diameter of nose piece 3.2 -3.7mm) or an electric riveting gun. The riveting action takes approximately 3 - 5 seconds per hole, with an electric riveter it is even faster.



Diameter of RiveStop	To suit maximum hole size	Length of RiveStop	Water pressure resistance	Finish
21mm	24mm	33mm	3 bar	Plastic
24mm	26mm	48mm	5 bar	ОГ
27mm	30mm	50mm	5 bar	Stainless stee

Two easy steps



Place RiveStop into the form tie hole



Expand it until rivet snaps and then it's totally sealed



Nationwide Depots

St Neots	t 01480 702222	f 01480 702223		
Airdrie	t 01236 541130	f 01236 541135		
Birmingham	t 0121 2893 293	f 0121 2893 294		
Bordon	t 01420 200 121	f 01420 200 122		
Launceston	t 01566 721011	f 01566 721012		
Warrington	t 01925 202 128	f 01925 202 129		

Head Office Cambs PF19 10S

Hawkesden Road, St Neots, Cambs PE19 1QS t 01480 702222 f 01480 702223

> e sales@miersconstructionproducts.co.uk www.miersconstructionproducts.co.uk